

Specifications for Inground Tumbler Trak

Pit Dimensions

- Width:** The inside dimensions of the width of the pit is 78". The space between the edges of the flat rails is 75 1/2"
- Depth:** The recommended depth of the pit is 22-24".
- Length:** The length of the pit should be exactly the length of the Tumbler Trak you are ordering

Concrete Walls

The walls **must** be poured **cement** (not block). The concrete mix used should be at least 3000 PSI and should **never** be allowed to freeze. If these conditions are not met, you may be required to purchase a wedge bolt style fastener with plastic cap (vs. The mushroom head spike bolt that is provided with your order).

Drilling Holes in your Concrete

Use a concrete drill with a 1/2" bit. Holes should be drilled 16" apart on each side of the pit beginning 4" from the edge.

Steel Framework



A 6" wide steel plate is fastened on the top edge of the Tumbler Trak pit wall. Each steel plate is 6" wide x 10" long x 1/4" thick. One side of the plate has holes drilled every 16". These are the holes that will be used to fasten the steel plate to the concrete. The other side of the plate has holes every 2.5" apart. These are the holes that will be used to attach the springs of the Tumbler Trak. If you have a closed end, there will be an end rail that is 87 1/2" long x 6" wide x 1/4" thick.




Tumbler Trak
Train Smart

Any questions or problems, please call Tumbler Trak at (800) 331-4362


Closed End Inground Tumbler Trak

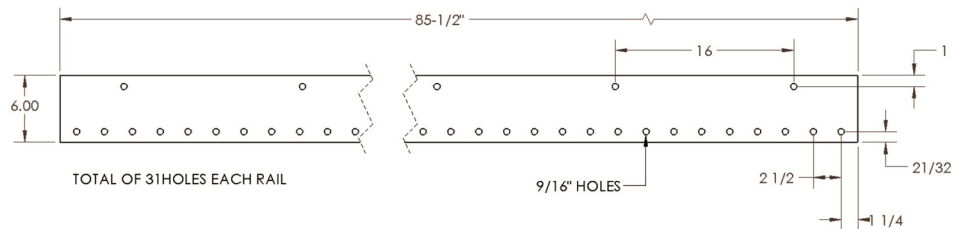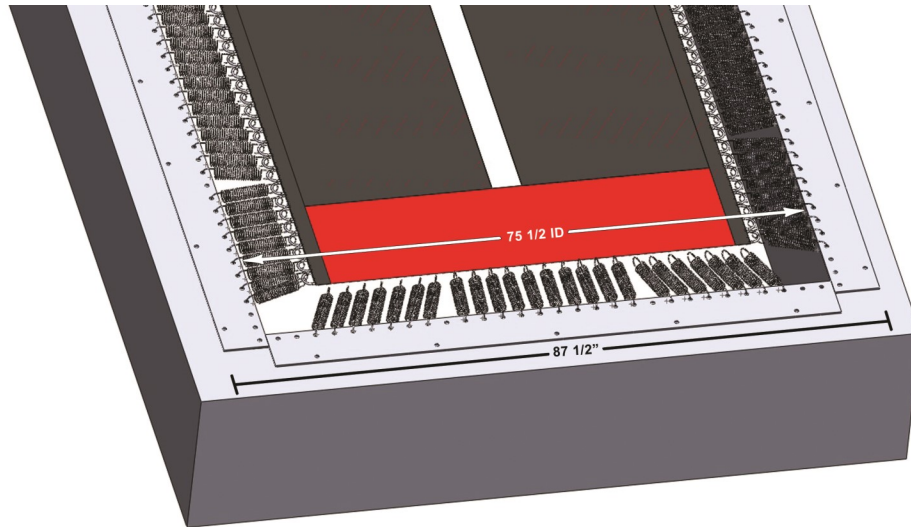

Opened End Inground Tumbler Trak

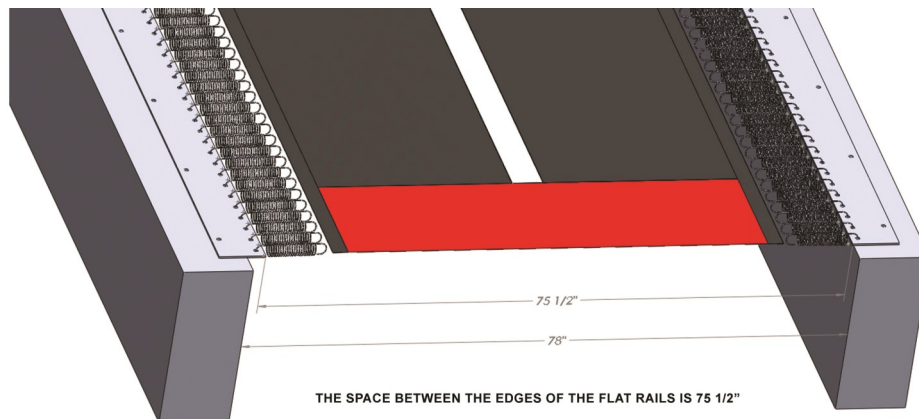

THE WALLS MUST BE POURED CEMENT, NO BLOCK. SEE YOUR CONTRACTOR ABOUT RECOMMENDED WIDTH OF THE POURED WALL. THE INSIDE DIMENSIONS OF THE WIDTH OF THE PIT IS 78". THE RECOMMENDED DEPTH OF THE PIT IS 22-24".

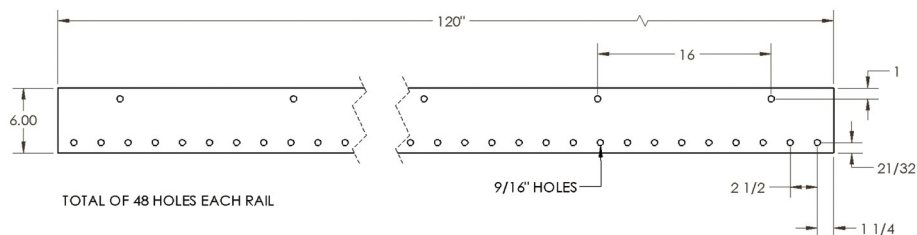

Tumbler Trak
Train Smart

Any questions or problems, please call Tumbler Trak at (800) 331-4362